

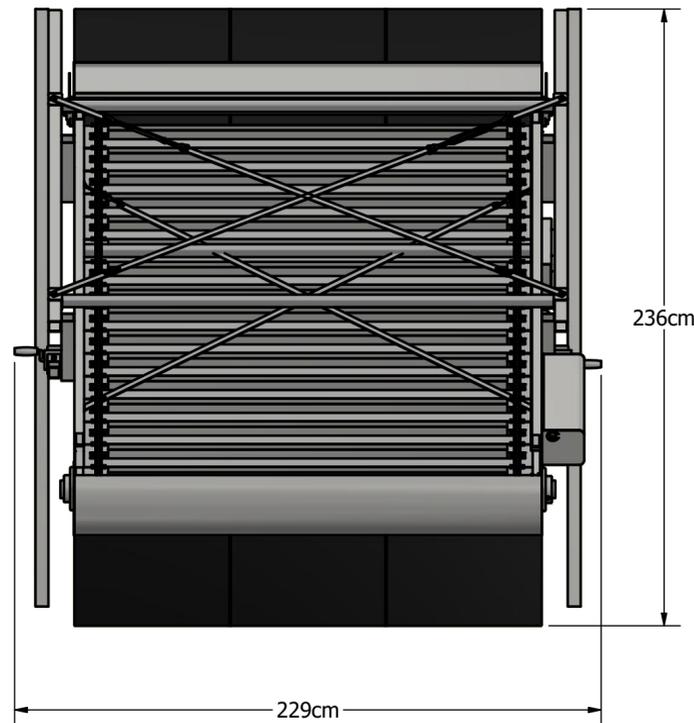
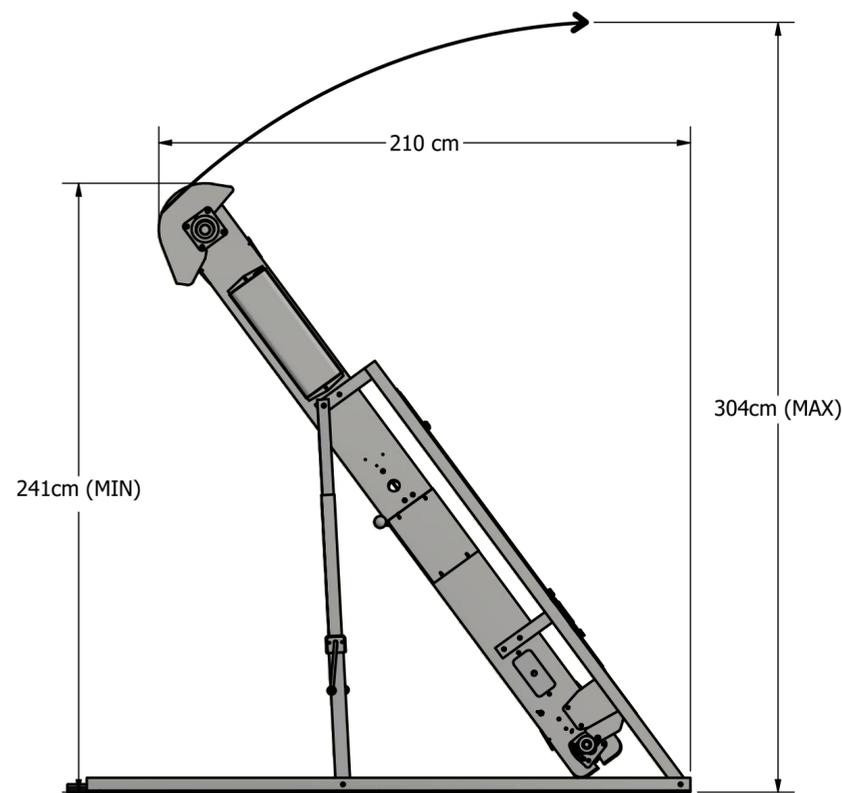


Treadwall® Kore6/10 Rotating Walls

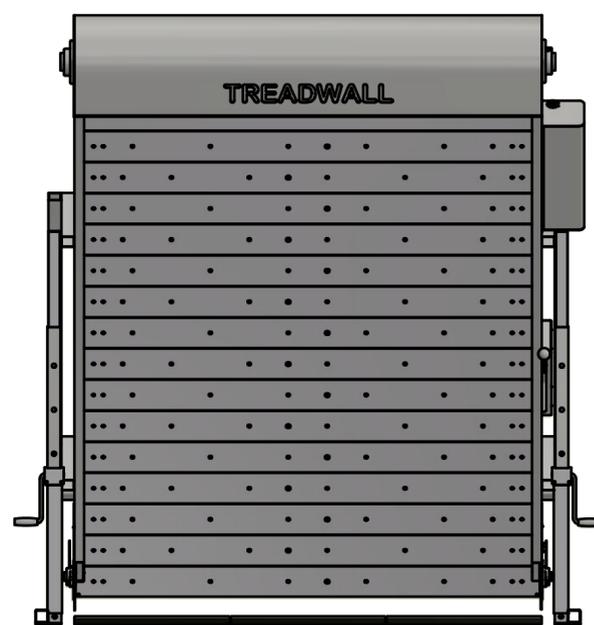

The Kore6/10 unit is a Treadwall designed for solely residential, climbing-focused use. It is only used at overhanging angles, and sold as a Base unit with options or the complete Pro package. The wall's rotation is powered by the climber's weight - there are no motors. The wall angle is adjusted using the new and enhanced hand crank system, which allows on-going adjustments through three broad ranges. A patented auto-stop mechanism gently brakes the wall when the climber's feet reach the bottom, matching the wall's movement to the climber, and a lever on the right side adjusts speed or resistance. The Kore6/10 is designed to fit under a 3.04 m ceiling (details below). See Kore6/11 units for higher ceilings. There is no Kore6/12 option.

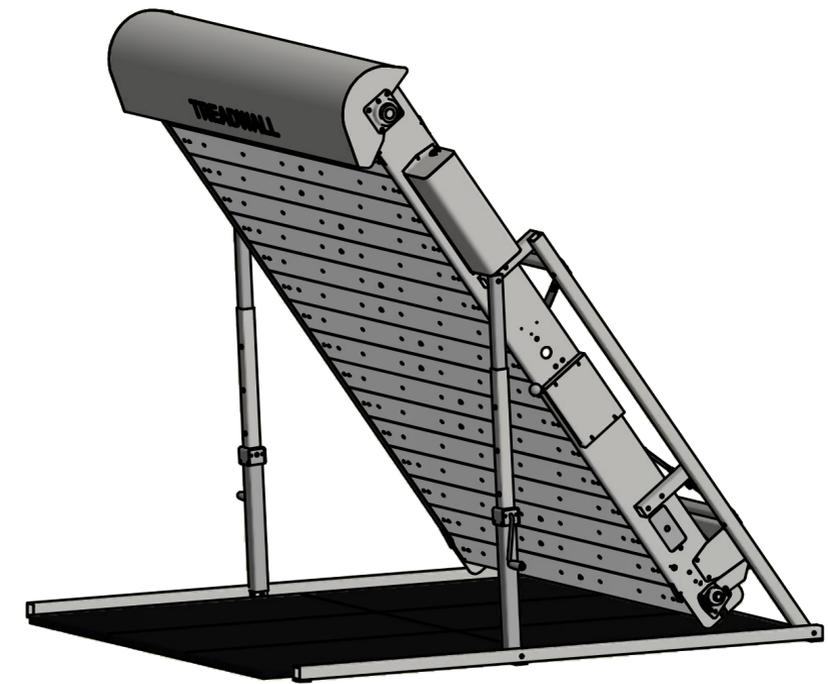


SPECIFICATIONS:




Weight: 408 kg.
 Construction: Steel framework with custom-machined wood panels.
 Placement: Inside standard - outside with exterior upgrade.
 Width of climbing surface: 183cm.
 Total length of climbing surface: 5.5m.
 Number of possible hold placements: 252.
 Angle range: negative 5 degrees to negative 35 degrees.
 Mode of control: Electro-hydraulic braking and resistance.
 Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.
 Electronic Display: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.
 Color - frame: Anthracite Gray is standard. Custom colors available.
 Color - panels: Natural Wood
 Holds: Set of 45 custom training holds in 3 color groups, with optional 14 ladder Line^(tm) holds.
 Maximum hold size: 6.3cm high by 15cm inches wide.
 Floor Mat: 1.22m x 2.4m custom mat, 6.3cm dual foam, black 14oz. vinyl cover.
 Warranty: Two years parts. See full warranty for details.

METRIC

Treadwall® Kore6/11 Rotating Walls

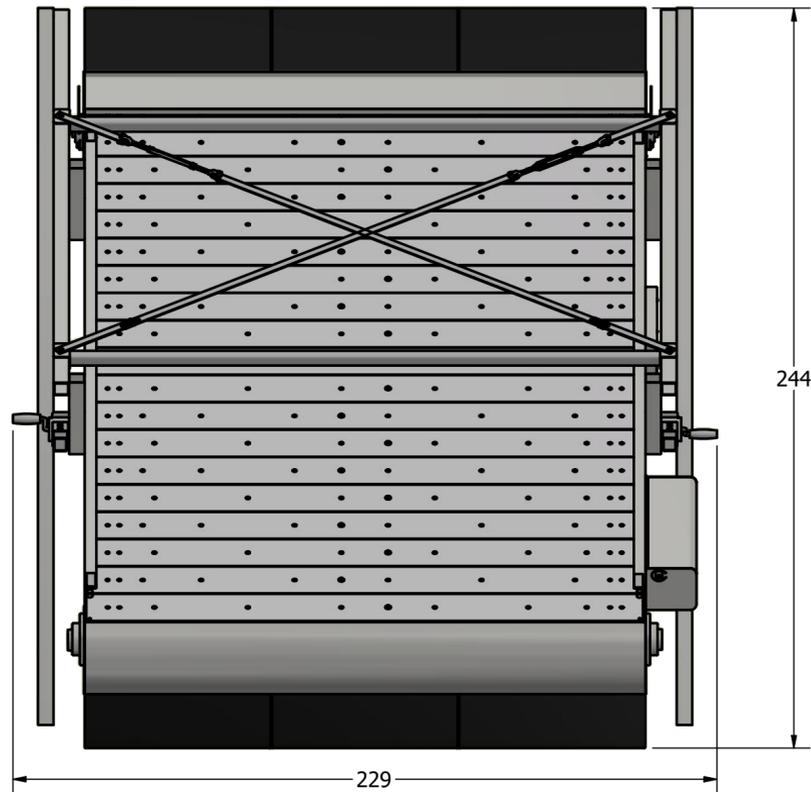

The Kore6/11 unit is a Treadwall designed for solely residential, climbing-focused use. It is only used at overhanging angles, and sold as a Base unit with options or the complete Pro package. The wall's rotation is powered by the climber's weight - there are no motors. The wall angle is adjusted using the new and enhanced hand crank system, which allows on-going adjustments through three broad ranges. A patented auto-stop mechanism gently brakes the wall when the climber's feet reach the bottom, matching the wall's movement to the climber, and a lever on the right side adjusts speed or resistance. The Kore6/11 is designed to fit under a 333cm ceiling (details below). See Kore6/10 units for lower ceilings. There is no Kore6/12 option.

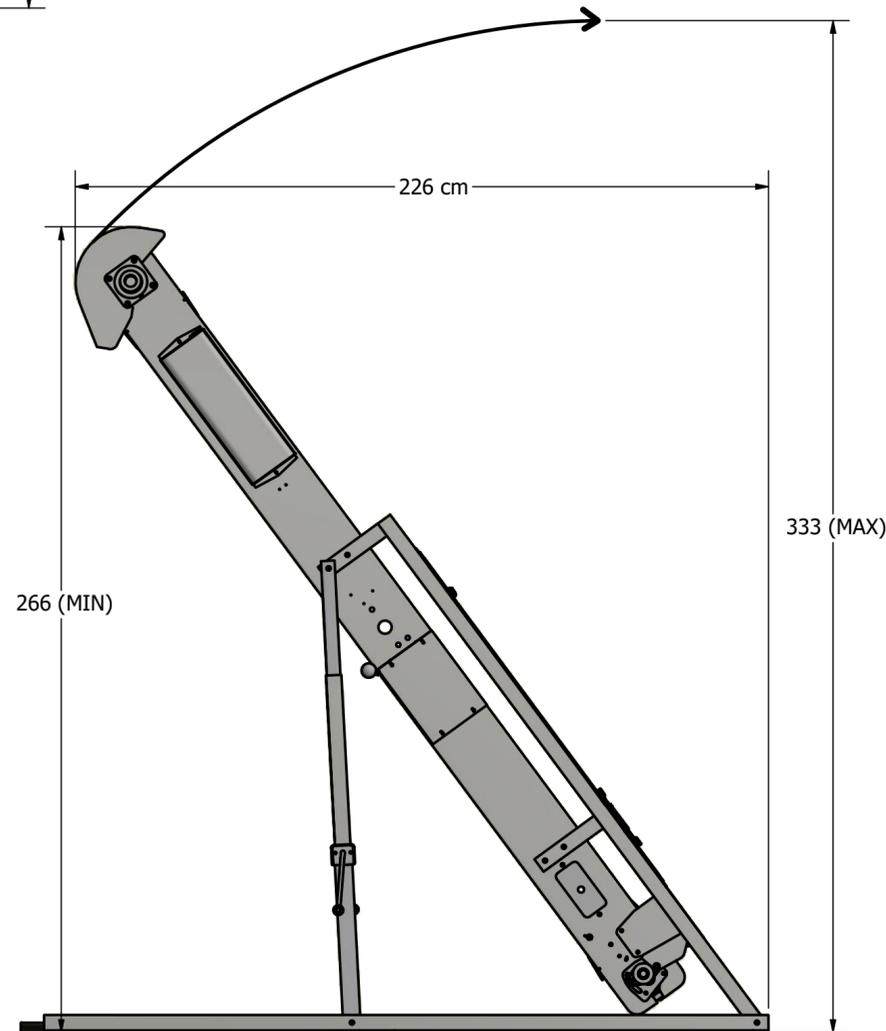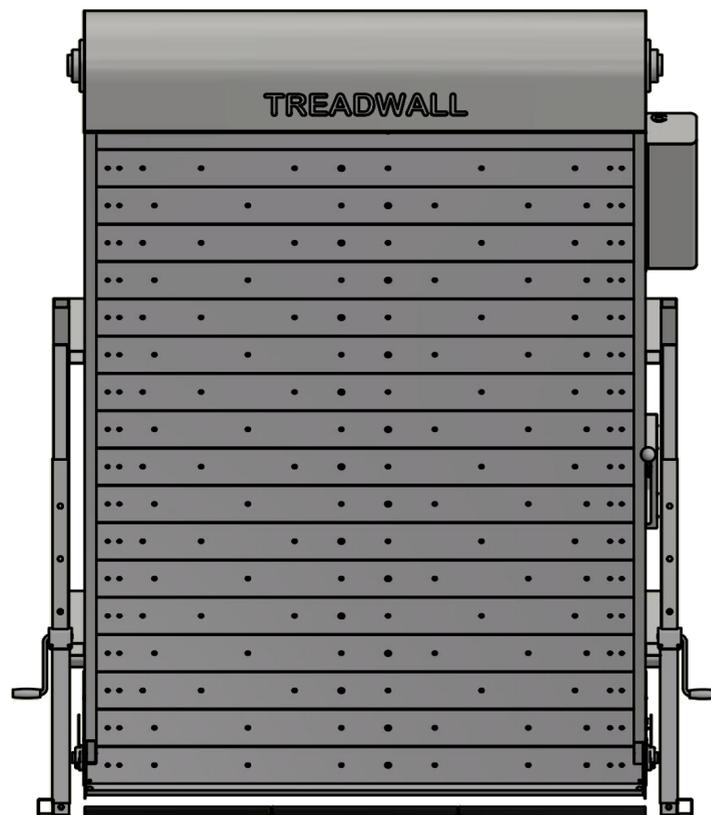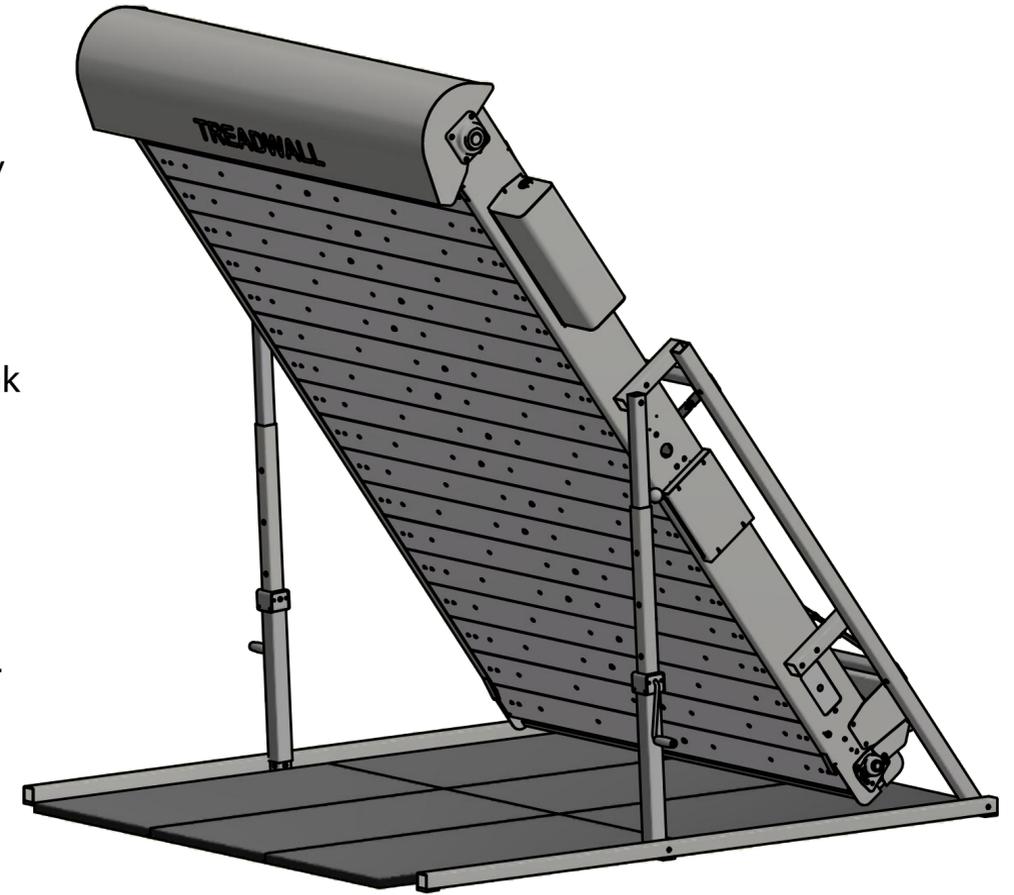

SPECIFICATIONS:

- Weight: 430 kg.
- Construction: Steel framework with custom-machined wood panels.
- Placement: Inside standard - outside with exterior upgrade.
- Width of climbing surface: 1.8 m.
- Total length of climbing surface: 5.1 m.
- Number of possible hold placements: 280.
- Angle range: negative 5 degrees to negative 35 degrees.
- Mode of control: Electro-hydraulic braking and resistance.
- Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.
- Electronic Display: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.
- Color - frame: Anthracite Gray is standard. Custom colors available.
- Color - panels: Natural Wood
- Holds: Set of 45 custom training holds in 3 color groups, with optional 14 ladder Line^(tm) holds.
- Maximum hold size: 6.4 cm high by 15.3 cm wide.
- Floor Mat: 1.5 m x 2 m custom mat, 3.2 cm dual foam, black 14 oz. vinyl cover.
- Warranty: two years parts. See full warranty for details.